



Jiangyin No. 3 Rubber Manufacturer Co., Ltd.



Add: No. 52, Zhenyang Road, Qingyang Town, Jiangyin City, Wuxi, Jiangsu, China

Tel: 86 - 510 - 86558834

Company Profile

With 34 years experience in producing rubber oil seals, Jiangyin No.3 Rubber Manufacturer Co., Ltd. is a professional manufacturer and industry leader in the researching, manufacturing and selling types of skeleton oil seals, O rings, Rubber gaskets, Pump valve oil seals and Oil seal cover.

Since its inception, Jiangyin No.3 Rubber Manufacturer has always paid great attention to maintaining a high level of quality control and process management, thus to guarantee all of our products are of top quality at the best price. Our quality control team checks and tests each piece of rubber product prior to shipping, assuring complete customer satisfaction. Besides, we have a strong sales team to provide sales and on-site service should the need ever occur. Our customer service team is ready to help you in any way.

As an ISO9001:2008, ROHS certified company, we have already established a long term business relationship with overseas countries and regions. And our Oil seals, O rings and rubber gaskets are popularly sought after in Europe, America, Australia, Southeast Asia, Russia and many other countries.

Located in Jiangyin city, which is only 40 minutes by high-speed train from Shanghai---this convenient transport condition allows us to provide our afore-mentioned rubber sealing products at a very competitive price. If you have any needs or interesting on Rubber sealing, O ring seals and Pump valve oil seals, please feel free to contact with us. And we also welcome OEM and ODM orders. Jiangyin No.3 Rubber team will assure that our high quality products and best service is your first choice and favorite supplier in China. We sincerely welcome friends from all over the world to visit our company and cooperate with us on the basis of long-term mutual benefits.



Certificate-1



The Authentication Certificate of Quality Management System

Jiangyin (No.3) Rubber Manufacturer Co. Ltd.

Registered/Production/Business/Office Address: Anxi Village, Fengjiawei Village, Sihou Village, Qingyang Town, Jiangyin.

Is in conformity with
(GB/T19001-2008/ISO9001:2008)


The certificate is valid for the following scope:
Axis lip seals, o-type rubber seal production and after-sales service.

Registration No. of Certificate:	05315Q20097R3M
Date of the Awarded Certificate:	03-08-2015
Term of the Certificate's Validity:	03-08-2015-02-08-2018
Date of the First Authentication:	24-10-2006
Enterprise Organization Code:	14225677-3

This certificate in the provisions of the state's administrative license, qualification within the scope of used together shall be valid. The certificate information can be in the Certification and Accreditation Administration of the People's Republic of China web site inquiries (CNAS.CNAS.CNAS.CN). If not stick the laser surveillance mark after the date of surveillance expires, this certificate is invalid.

The first surveillance The second surveillance

Beijing NGV Certification Centre Co., Ltd. CNAS IAF



No 2017130

检验报告

产品名称 旋转轴唇形密封圈Φ130×155×10

委检单位 江阴市第三橡胶制品有限公司

检验类别 委托检验

国家橡胶密封制品质量监督检验中心

STQ 测试报告 页码号: 1/4


报告编号: SZZ016080197(C) 日期: 2016年08月12日

客户: 江阴市第三橡胶制品有限公司
地址: 江阴市青阳镇工业园区

以下测试样品由申请人提供及确认:
样品名称: 油封料
测试型号: 20×30×7
可覆盖型号: /
到样日期: 2016年08月08日
测试周期: 2016年08月08日-2016年08月11日

测试说明及结论:
依照客户要求, 对送检样品进行如下测试:
要求: 铅, 镉, 汞, 六价铬, 多溴联苯和多溴二苯醚含量-欧盟 RoHS 指令 2011/65/EU 结论: 合格
(RoHS 2.0)

STQ

签发:  实验室经理

STQ Testing Services Co., Ltd.
Add.: F3B, 218 Xinghu St., Suzhou Industrial Park, China, 215123
Tel.: +86 (0)512 87661878 Fax: +86 (0)512 87661802 Web: www.stq-cert.com
Technical service: TS@stq-cert.com Customer service: CS@stq-cert.com

STQ 测试报告 页码号: 4/4


报告编号: SZZ016080197(C) 日期: 2016年08月12日

3. 多溴联苯和多溴二苯醚测试

```

    graph TD
      A[称样并将其置于球形瓶中] --> B[加入有机溶剂萃取]
      B --> C[浓缩萃取液]
      C --> D[将萃取液转移至容量瓶中]
      D --> E[用有机溶剂定容]
      E --> F[GC-MS 仪器分析]
    
```

样品照片



***** 报告结束 *****

STQ Testing Services Co., Ltd.
Add.: F3B, 218 Xinghu St., Suzhou Industrial Park, China, 215123
Tel.: +86 (0)512 87661878 Fax: +86 (0)512 87661802 Web: www.stq-cert.com
Technical service: TS@stq-cert.com Customer service: CS@stq-cert.com

Certificate-2



Products Category

一、 Oil Sealing Seals

1. Oil Seals

1.1 Inner skeleton oil seal

1. NBR oil seal
2. FKM oil seal
3. Silicon oil seal
4. HNBR oil seal
5. EPDM oilseal
6. Other oil seas (ACM oil seal + non-standard Custom parts)

1.2 J type oil seal

1.3 Exposed skeleton oil seal

二. O Rings

1. NBR O-ring
2. FKM O-ring
3. Silicon O-ring
4. HNBR O-ring
5. EPDM O-ring
6. Other O Rings (ACM oil seal + non-standard Custom parts)

三. Pump valve oil seals

四. Rubber Wheels

五: Rubber Gasket/Washer

1. Silicone gasket
2. NBR gasket
3. FKM gasket
4. EPDM gasket
5. HNBR gasket
6. Other rubber washer (ACM gasket + Other materials gasket)

六: Rubber End Cap seals

七. Rubber Sealing strip

1. Silicone sealing strip
2. EPDM sealing strip

八: Custom & New products



Oil Seal



Technical Data

Item name:	Out Frame Oil Seal
Material:	NBR, FKM,Silicon,HNBR,EPDM,ACM
Speed:	Speed Mechanical Seal
lip:	single lip are available
Shape:	O Type
Color:	Black, brown or as you required
Pressure:	Pressure type
Working Medium:	Water, lubricating oil.Oil and grease
Payment terms:	T/T / Western Union
Trademark:	ODM, OEM
Performance:	High temperature resistance,Good oil resistance
Standard:	Nonstandard / Standard
Transport package:	Carton or as Your Required
Factory visit:	Available
Company Type	Manufacturer/Factory & Trading Company
Origin:	China(mainland)
Hscode:	4016931000

6x22x8	TC	12x32x10	TC	17x30x8	TC	20x40x8	TC
8x14x4	SC	12x32x7	TC	17x30x10	TC	20x42x7	TC
8x16x4	TC	13x22x7	TC	17x30x10	TC	20x42x7	TC
8x16x5	TC	13x24x7	SC	17x35x10	TC	20x42x10	TC
8x16x7	SC	14x24x7	SC	17x35x10	SC	20x45x10	TC
8x19x7	TC	14x24x8	TC	17x35x5	TC	20x45x10	TC
8x20x7	TC	14x25x7	TC	17x35x7	TC	20x45x10	SC
8x22x7	SC	14x28x4	TC	17x35x8	TC	20x47x7	TC
8x22x8	SC	14x28x7	TC	17x40x7	TC	20x47x8	TC
8x22x8	TC	14x28x7	TC	17x40x10	TC	20x47x10	SC
9x22x7	TC	14x28x10	TC	17x40x12	TC	20x47x10	TC
10x19x5	TC	14x29x7	TC	18x28x5	TC	20x50x10	TC
10x19x6	TC	14x30x7	TC	18x30x6	TC	20x52x7	TC
10x19x7	TC	14x30x10	TC	18x30x7	TC	20x52x3	SC
10x20x8	TC	14x35x7	TC	18x30x8	TC	20x52x6	SC
10x22x10	TC	14x35x10	SC	18x30x10	SC	21x35x6	TC
10x22x10	TC	15x24x5	TC	18x30x10	TC	21x35x7	TC
10x22x7	SC	15x24x7	TC	18x35x10	SC	21x35x8	TC
10x22x8	SC	15x25x5	TC	18x35x10	TC	21x38x6	TC
10x22x8	TC	15x26x7	TC	18x35x7	TC	22x30x10	SC
10x25x5	SC	15x28x5	SC	18x40x7	TC	22x32x5	SC
10x25x10	SC	15x28x7	TC	18x40x10	TC	22x32x7	TC
10x26x4	TC	15x28x7	SC	20x30x5	SC	22x35x6	TC
10x26x7	TC	15x28x10	SC	20x30x5	TC	22x35x7	TC
10x26x7	SC	15x30x5	SC	20x30x6	TC	22x35x6.7	TC
10x26x8	TC	15x30x5	TC	20x30x7	SC	22x35x8	TC
10x28x7	TC	15x30x10	TC	20x30x7	SC	22x38x8	TC
10x28x10	TC	15x30x10	SC	20x30x7	TC	22x38x10	SC
11x19x5	TC	15x32x7	TC	20x30x8	TC	22x38x10	TC
12x19x3	SC	15x35x6	TC	20x30x9	TC	22x40x6	TC
12x20x6	SC	15x35x10	TC	20x30x10	SC	22x40x7	TC
12x22x5	TC	15x35x7	TC	20x32x7	TC	22x40x8	TC
12x22x6	TC	15x40x10	SC	20x32x7	TC	22x40x8	TC
12x22x7	TC	16x28x7	TC	20x35x10	TC	22x40x9	TC
12x22x7	SC	16x30x7	TC	20x35x10	TC	22x40x10	SC
12x24x7	SC	16x30x7.5	TC	20x35x5	TC	22x40x10	TC
12x24x7	TC	16x30x10	TC	20x35x7	TC	22x42x7	TC
12x25x5	SC	16x35x7	TC	20x35x7	TC	22x42x10	SC
12x25x7	TC	16x35x10	TC	20x35x8	SC	22x42x11	TC
12x25x10	TC	16x35x10	TC	20x37x7	TC	22x42x12	SC
12x28x7	TC	17x28x5	SC	20x37x7	TC	22x45x10	TC
12x28x8	TC	17x28x7	TC	20x40x10	TC	22x45x10	SC
12x28x10	TC	17x28x7	SC	20x40x7	TC	22x50x10	TC
12x30x10	TC	17x30x7	TC	20x40x7	SC	22x65x8	TC
22x72x12	TC	25x42x7	TC	27x70x10	TC	30x45x7	TC
23x35x7	TC	25x42x8	TC	27x72x10	TC	30x45x10	TC
23x37x7	TC	25x44x6	TC	28x38x5	TC	30x45x10	SC
23x38x9	SC	25x45x8	SC	28x38x7	TC	30x45x12	TC
23x40x7	TC	25x45x8	TC	28x38x7	SC	30x46x8	TC
23x42x7	TC	25x45x8	TC	28x40x7	TC	30x47x5	TC
23x40x8	TC	25x45x10	TC	28x40x8	TC	30x47x7	SC
23x47x7	TC	25x45x10	TC	28x42x6	TC	30x47x7	TC
24x40x6	TC	25x45x10	SC	28x42x7	TC	30x47x7	TC
24x40x7	SC	25x45x10	TC	28x42x8	TC	30x47x8	TC
24x40x7	TC	25x45x12	TC	28x45x10	TC	30x47x10	TC

O-Rings



Technical Data

Name	O-ring
Material Type	NBR, FKM,Silicon,HNBR,EPDM,ACM
Hardness Range	20-90 Shore A
Color	Black, Brown, Red and So on
Size	All Size
Tolerance Standard	AS568, ISO2768-M or ISO3302-1:2014 CLASS M2
Material Characteristic	Wear resistance,Water resistance,Oil resistance,Adhesion to metal
OEM / ODM	Available
Packing Details	PE plastic bags then to the carton / as per your request
Production Capacity & Lead Time	
Production Capacity	300000PCS/Month
Lead Time	7-15 days after payment
Port of Loading	Shanghai/Ningbo Port
Rubber Specification & Inspection Standard	
Rubber Specification	ASTM D2000, SAE J200
Quality Acceptance Criteria	BS/ISO 3601-3:2008

Size

1.4×1.8	11.2×1.8	41.2×1.8	17×2.65	54.5×2.65	118×2.65	25×3.55	112×3.55
1.8×1.8	11.8×1.8	42.5×1.8	18×2.65	56×2.65	120×2.65	25.8×3.55	115×3.55
2×1.8	12.5×1.8	43.7×1.8	19×2.65	58×2.65	125×2.65	26.5×3.55	118×3.55
2.24×1.8	13.2×1.8	45×1.8	20×2.65	60×2.65	128×2.65	28×3.55	119×3.55
2.5×1.8	14×1.8	46.2×1.8	21.2×2.65	61.5×2.65	132×2.65	30×3.55	120×3.55
2.8×1.8	15×1.8	47.5×1.8	22.4×2.65	62.5×2.65	136×2.65	31.5×3.55	122×3.55
3.15×1.8	15.4×1.8	48.7×1.8	23.6×2.65	63×2.65	140×2.65	32.5×3.55	125×3.55
3.55×1.8	16×1.8	50×1.8	25×2.65	65×2.65	145×2.65	33.5×3.55	128×3.55
3.75×1.8	17×1.8	55×1.8	25.8×2.65	67×2.65	150×2.65	34.5×3.55	132×3.55
4×1.8	18×1.8	63×1.8	26.5×2.65	69×2.65	155×2.65	35.5×3.55	136×3.55
4.5×1.8	19×1.8	65×1.8	28×2.65	70×2.65	160×2.65	36.5×3.55	140×3.55
4.87×1.8	20×1.8	67×1.8	30×2.65	71×2.65	165×2.65	37.5×3.55	145×3.55
5×1.8	21.2×1.8	73×1.8	31.5×2.65	73×2.65	170×2.65	38.7×3.55	150×3.55
5.15×1.8	22.4×1.8	77.5×1.8	32.5×2.65	74×2.65	175×2.65	40×3.55	155×3.55
5.3×1.8	23.6×1.8	85×1.8	33.5×2.65	75×2.65	180×2.65	41.2×3.55	160×3.55
5.6×1.8	24.5×1.8	7.1×2.65	34.5×2.65	77.5×2.65	190×2.65	42.5×3.55	165×3.55
6×1.8	25×1.8	7.5×2.65	35.5×2.65	80×2.65	200×2.65	43.7×3.55	170×3.55
6.3×1.8	25.8×1.8	8×2.65	36.5×2.65	80.4×2.65	250×2.65	45×3.55	175×3.55
6.7×1.8	26.5×1.8	8.5×2.65	37.5×2.65	82.5×2.65	258×2.65	46.2×3.55	180×3.55
6.9×1.8	28×1.8	8.75×2.65	38.7×2.65	85×2.65	280×2.65	47.5×3.55	185×3.55
7.1×1.8	30×1.8	9×2.65	40×2.65	87.5×2.65	380×2.65	48.7×3.55	190×3.55
7.3×1.8	31.5×1.8	9.5×2.65	41.2×2.65	90×2.65	450×2.65	49.2×3.55	195×3.55
7.5×1.8	32.5×1.8	10×2.65	42.5×2.65	92.5×2.65	7.5×3.55	50×3.55	200×3.55
7.8×1.8	33.5×1.8	10.6×2.65	43.7×2.65	95×2.65	16×3.55	51.5×3.55	212×3.55
8×1.8	34.5×1.8	11.2×2.65	45×2.65	97.5×2.65	17×3.55	53×3.55	218×3.55
8.5×1.8	35.5×1.8	11.8×2.65	46.2×2.65	100×2.65	18×3.55	54.5×3.55	225×3.55
8.75×1.8	36.5×1.8	12.5×2.65	47.5×2.65	103×2.65	19×3.55	56×3.55	230×3.55
9×1.8	37.5×1.8	13.2×2.65	48.7×2.65	106×2.65	20×3.55	58×3.55	236×3.55
9.5×1.8	38.7×1.8	14×2.65	50×2.65	109×2.65	21.2×3.55	60×3.55	241×3.55
10×1.8	39.2×1.8	15×2.65	51.5×2.65	112×2.65	22.4×3.55	61.5×3.55	250×3.55
10.6×1.8	40×1.8	16×2.65	53×2.65	115×2.65	23.6×3.55	63×3.55	265×3.55

Pump valve oil seals



Technical Data

Item name:	pump valve oil seal
Material:	fluorine rubber
Application:	Pump Valve
Speed:	0-30m / s
lip:	Lip Seal
Shape:	V Type , U Type ,K Type
Color:	Black,or as you required
Pressure:	Pressure type
Working Medium:	Water, oil, grease, dust and so on;
Payment terms:	T/T / Western Union
Trademark:	ODM, OEM
Performance:	High temperature resistance,Good oil resistance
Standard:	Nonstandard / Standard
Transport package:	Carton or as Your Required
Factory visit:	Available
Company Type	Manufacturer/Factory & Trading Company
Origin:	China(mainland)
Hscode:	4016931000

Size

25x45x10	55x85x12
30x47x12	60x80x12
35x52x12	65x90x12
35x60x12	70x90x12
40x70x12	70x95x12
45x65x12	70x100x12
45x70x12	75x95x12
50x70x12	75x100x12
50x72x12	80x100x12
50x80x12	80x110x12
55x75x12	85x110x12
55x80*12	90x120x12

Rubber Wheels



Technical Data

material

Silicone rubber covered with metal or other materials. It is used for high temperature, ozone resistance, chemical inertness and non-adhesion to plastics.

application

Hot stamping machine, hot transferring printing machine, edge banding machine, laminating machine form a complete set of consumables, used for all kinds of household electrical appliances, audio, wood and plastic materials, picture frames, all kinds of building decoration materials, handicrafts, electronic products, instruments, instrument of the plastic shell bronzing, hot silver, and heat transfer process.

Directions for use

1. Turn on the rubber roll, and the starting temperature is controlled at about 100 degrees.
2. After the internal and external temperature is consistent, the temperature will be repeated at a time of 10 degrees, until the desired temperature is reprinted.
3. Adjust the temperature, time and pressure in the printing process.
4. During the use of rubber roller, it is strictly forbidden to suddenly pressurize or impinge, strictly no large heating.
5. After a period of time, if the surface is uneven or small, it should be polished and then used.
6. The transfer machine needs to turn off the temperature before cooling and then stop the roll.

Size

38mm*100mm*300mm
38mm*100mm*400mm
38mm*100mm*600mm
58mm*125mm*300mm
37mm*100mm*300mm
38mm*125mm*300mm


Rubber Gasket/Washer



Technical Data

Name	Rubber Gasket
Material Type	NBR,EPDM,SILICONE,VITON,SBR,NR,etc.
Hardness Range	20-90 Shore A
Color	Black,Red,Brown,etc
Size	All Size
Material Characteristic	Wear resistance,Water resistance,Oil resistance,Adhesion to metal
Application	Widely used for all kinds of hot and cold water inlet pipes of washing machines. It play important role in sealing of the connections.
OEM / ODM	Available
Packing Details	PE plastic bags then to the carton / as per your request
Production Capacity & Lead Time	
Production Capacity	300000PCS/Month
Lead Time	7-15 days after payment
Shipping & Payment Terms	
Port of Loading	Shanghai/Ningbo Port
Shipping Method	SEA,AIR,DHL,UPS,FEDEX,TNT, etc.
Payment Terms	T/T, L/C, Paypal, Western Union
Rubber Specification & Inspection Standard	
Quality Acceptance Criteria	BS/ISO 3601-3:2008

Rubber End Cap seals

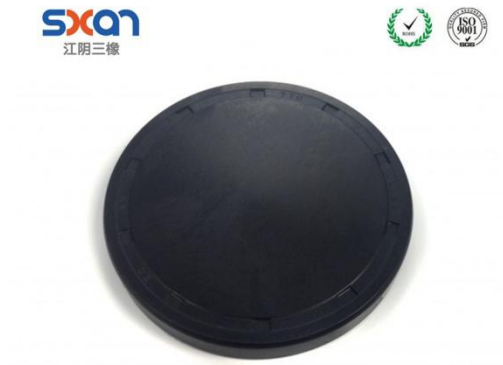

Technical Data

Name	End cap seal
Material Type	NBR
Hardness Range	30-85 Shore A
Size	All Size
Material Characteristic	Wear resistance, Water resistance, Oil resistance, Adhesion to metal
Application	It is mainly used for the orifice, the core opening and the bearing of an oil seal, which is particularly used as a substitute for an end flange or an end cover in a gear box, and the rubber layer at the outer diameter ensures the oil leakage in the oil seal seat. At the same time, it also strengthens the neatness and beauty of the cabinet.
OEM / ODM	Available
Packing Details	PE plastic bags then to the carton / as per your request
Production Capacity & Lead Time	
Production Capacity	300000PCS/Month
Lead Time	7-15 days after payment
Shipping & Payment Terms	
Port of Loading	Shanghai/Ningbo Port
Shipping Method	SEA, AIR, DHL, UPS, FEDEX, TNT, etc.
Payment Terms	T/T, L/C, Paypal, Western Union
Rubber Specification & Inspection Standard	
Quality Acceptance Criteria	BS/ISO 3601-3:2008

Size

NO.	SIZE(D*H)	NO.	SIZE(D*H)	NO.	SIZE(D*H)	NO.	SIZE(D*H)
1	8*5	29	37*5	57	65*8	85	115*12
2	16*4	30	37*7	58	68*8	86	118*13.5
3	18*4	31	38*7	59	70*10	87	120*12
4	19*6	32	40*4.5	60	72*10	88	125*12
5	19*7	33	40*7	61	72*7	89	128.6*12
6	20*4	34	42*6	62	72*9	90	130*12
7	21*4	35	42*7	63	75*10	91	130*8
8	22*5	36	42*9.5	64	75*12	92	140*13
9	22*7	37	47*10	65	75*5	93	140*15
10	24*5	38	47*6.5	66	75*7	94	150*13
11	24*7	39	47*7	67	80*12	95	150*15
12	25*4	40	47*7.5	68	80*7	96	160*15
13	25*7	41	47*8	69	80*8	97	160*16
14	26*4	42	48*7	70	85*10	98	168*12
15	26*6.5	43	50*10	71	85*12	99	16815
16	28*5	44	50*7	72	85*8	100	170*13
17	28*7	45	52*10	73	90*10	101	170*15
18	30*4	46	52*6.5	74	90*12	102	180*12
19	30*6	47	52*7	75	90*8	103	190*12
20	30*7	48	55*10	76	92*10	104	200*13
21	30*8	49	55*7	77	95*10	105	210*15
22	32*5	50	55*8	78	95*12	106	215*15
23	32*7	51	56*7	79	98*6	107	220*15
24	32*9.5	52	58*9	80	100*10	108	225*14
25	35*6.5	53	60*10	81	100*12	109	230*14
26	35*7	54	60*7	82	105*10	110	240*15
27	35*8	55	60*8	83	110*10	111	250*15
28	37*10	56	62*10	84	110*12	112	

Rubber Sealing strip



Technical Data

Name	sealing strip
Material Type	Silicone
Hardness Range	20-90 Shore A
Size	All Size
Tolerance Standard	AS568, ISO2768-M or ISO3302-1:2014 CLASS M2
Material Characteristic	Wear resistance, Water resistance, Oil resistance, Adhesion to metal
Application	The seal has been used in the car, windows and doors, cabinets, refrigerators, container and other industries, according to the requirements of different industries, has developed a unique auto seal, mechanical seal, seal doors and windows and other products, so it is widely used in electronic electrical, lighting, pharmaceutical, chemical, machinery and equipment. Textile, chemical fiber, automobile and other sealing industries.
OEM / ODM	Available
Packing Details	PE plastic bags then to the carton / as per your request
Production Capacity & Lead Time	
Production Capacity	300000PCS/Month
Lead Time	7-15 days after payment
Shipping & Payment Terms	
Port of Loading	Shanghai/Ningbo Port
Shipping Method	SEA,AIR,DHL,UPS,FEDEX,TNT, etc.
Payment Terms	T/T, L/C, Paypal, Western Union
Rubber Specification & Inspection Standard	
Rubber Specification	ASTM D2000, SAE J200
Quality Acceptance Criteria	BS/ISO 3601-3:2008

Custom & New products



硅胶条



硅胶圈



硅胶圈



硅胶圈



硅胶圈



硅胶圈



硅胶圈



硅胶圈



硅胶圈



硅胶圈



硅胶圈



硅胶圈





硅胶圈



硅胶圈



硅胶圈

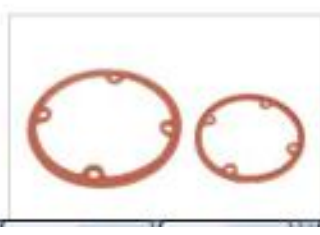

发泡硅胶条



硅胶条



硅胶条



硅胶条



硅胶条



硅胶条



硅胶条



硅胶条



硅胶圈



硅胶圈



硅胶圈



发泡条



发泡条



发泡条



发泡条



发泡条



发泡条



发泡条



发泡条



硅胶发泡条



硅胶板



硅胶产品



硅胶产品




硅胶产品



Rubber sealing Products Production Process



Rubber Sealing Products Production Process

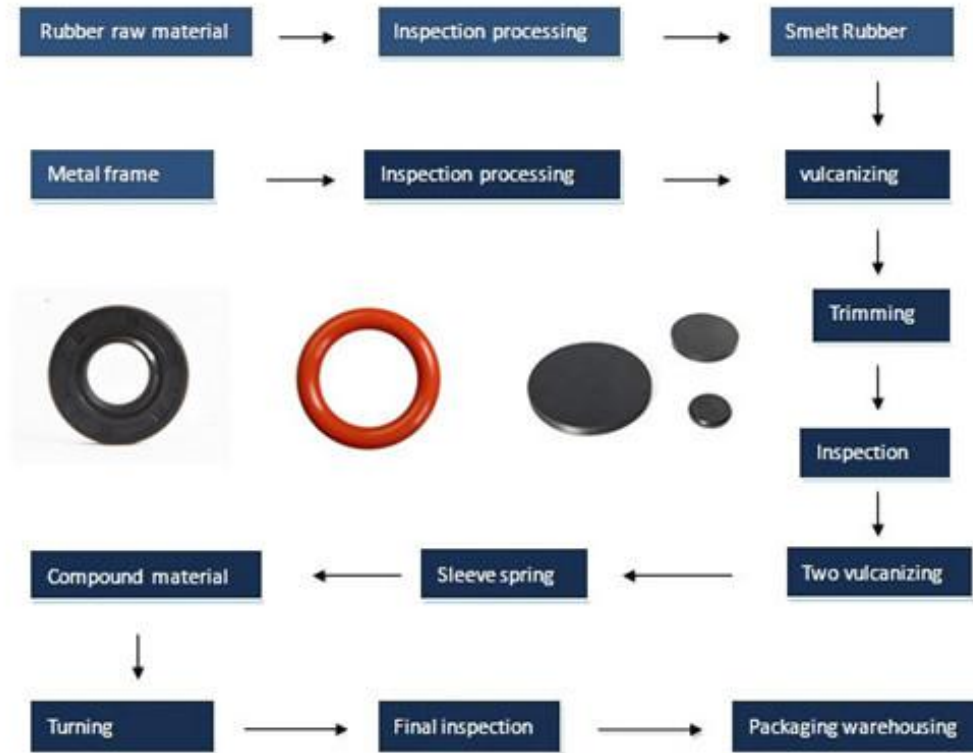

Warehouse



Delivery



Route

